



Flunder

Flunder 1/2" - 5/4"





70.050

70.075



1/2
150 - 250
60
S1: 2 × M8
S2: 2 × M8
S1: 15°
S2: 7.5°
175 × 90 × 40
2.70
x

3/4
200 - 400
100
S1: 2 × M8
S2: 4 × M8
S1: 10°
S2: 0°
160 × 105 × 55
3.40
x

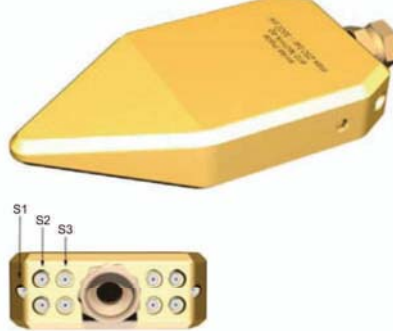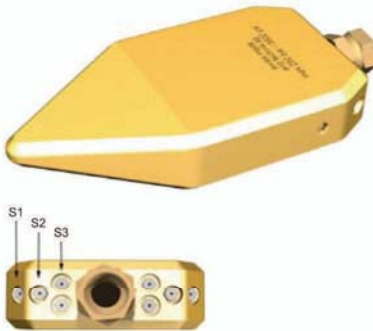

70.100

70.125



1
300 - 600
200
S1: 2 × M10
S2: 2 × M10
S3: 4 × M10
S1: 15°
S2: 7.5°
S3: 0°
300 × 160 × 60
12.30
x

1 1/4
400 - 800
250
S1: 2 × M10
S2: 4 × M10
S3: 4 × M10
S1: 15°
S2: 7.5°
S3: 0°
310 × 180 × 85
21.00
x

	Anschlussgewinde ["]		Schubstrahl		Gewicht [kg]
	Anwendungsbereich [mm]		Strahlwinkel hinten		Recycling
	min. l/min bei 100 bar		Länge × Breite × Höhe [mm]		